




# FO-LUSA-SS11-0\_\_\_-YE

## FIBER OPTIC PATCHCORD

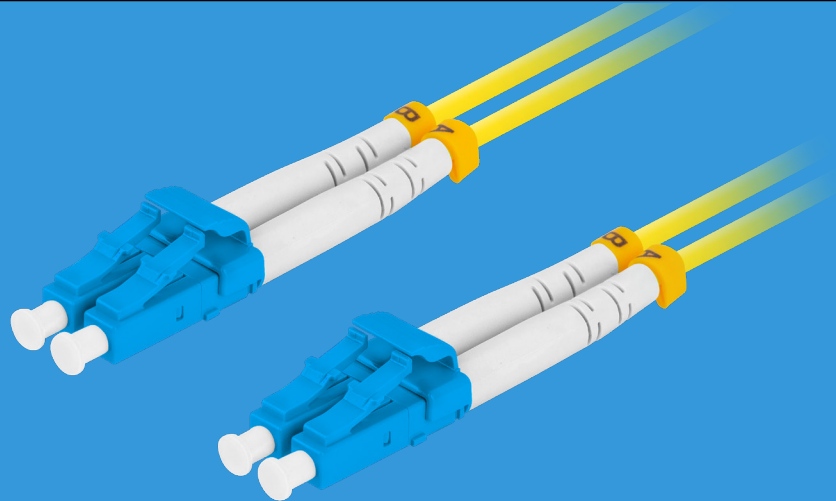

### PRODUCT SPECIFICATION:

- Connector type: SC, LC
- Polishing standard: APC - ANGLED PHYSICAL CONTACT  
UPC - ULTRA PHYSICAL CONTACT
- Fiber type: G657A1
- Type of optical fiber: single-mode (SM)
- Fiber diameter: 9/125 μm
- Cable Construction: SIMPLEX
- Cable diameter: 3.0 mm
- Coating: LSZH, LSOH (Low smoke zero halogen)
- Insertion loss: ≤ 0,25 dB
- Return loss: ≥ 60 dB
- Operating temperature: -40 - 85°C
- Minimum bend radius: 10 mm
- Color: yellow
- Cable length: 2 m, 3 m, 5 m

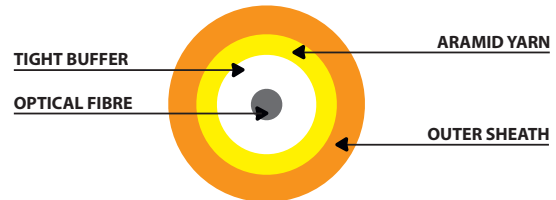

CAT.NO	FULL NAME
FO-LUSA-SS11-0020-YE	FIBER OPTIC PATCHCORD SM LC/UPC-SC/APC SIMPLEX 3.0MM LSZH G657A1 2M YELLOW LANBERG
FO-LUSA-SS11-0050-YE	FIBER OPTIC PATCHCORD SM LC/UPC-SC/APC SIMPLEX 3.0MM LSZH G657A1 5M YELLOW LANBERG
FO-LUSA-SS11-0030-YE	FIBER OPTIC PATCHCORD SM LC/UPC-SC/APC SIMPLEX 3.0MM LSZH G657A1 3M YELLOW LANBERG