



FO-SASA-SD11-0___-YE

FIBER OPTIC PATCHCORD

PRODUCT SPECIFICATION:

- Connector type: SC
- Polishing standard: APC - ANGLED PHYSICAL CONTACT
- Fiber type: G657A1
- Type of optical fiber: single-mode (SM)
- Fiber diameter: 9/125 μm
- Cable Construction: DUPLEX
- Cable diameter: 3.0 mm
- Coating: LSZH, LSOH (Low smoke zero halogen)
- Insertion loss: ≤ 0,25 dB
- Return loss: ≥ 60 dB
- Operating temperature: -40 – 85°C
- Minimum bend radius: 10 mm
- Color: yellow
- Cable length: 1 m, 2 m, 3 m, 5 m, 10 m, 15 m

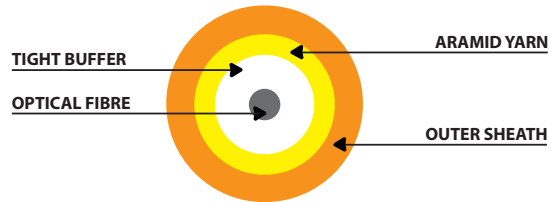

CAT.NO	FULL NAME
FO-SASA-SD11-0010-YE	FIBER OPTIC PATCHCORD SM SC/APC-SC/APC DUPLEX 3.0MM LSZH G657A1 1M YELLOW LANBERG
FO-SASA-SD11-0020-YE	FIBER OPTIC PATCHCORD SM SC/APC-SC/APC DUPLEX 3.0MM LSZH G657A1 2M YELLOW LANBERG
FO-SASA-SD11-0050-YE	FIBER OPTIC PATCHCORD SM SC/APC-SC/APC DUPLEX 3.0MM LSZH G657A1 5M YELLOW LANBERG
FO-SASA-SD11-0100-YE	FIBER OPTIC PATCHCORD SM SC/APC-SC/APC DUPLEX 3.0MM LSZH G657A1 10M YELLOW LANBERG
FO-SASA-SD11-0150-YE	FIBER OPTIC PATCHCORD SM SC/APC-SC/APC DUPLEX 3.0MM LSZH G657A1 15M YELLOW LANBERG